




MAS-VC Series Volume Controls

Model MAS-VC210, MAS-VC75

DATA SHEET

Features:

- Impedance Matching
- High Power Handling
- Removable Phoenix Connectors For Ease of Installation
- Use With 4 or 8 Ohm Speakers
- Attenuation at 6dB Per Step on Final 2 Steps For Whisper Smooth Transitions
- Positive Off

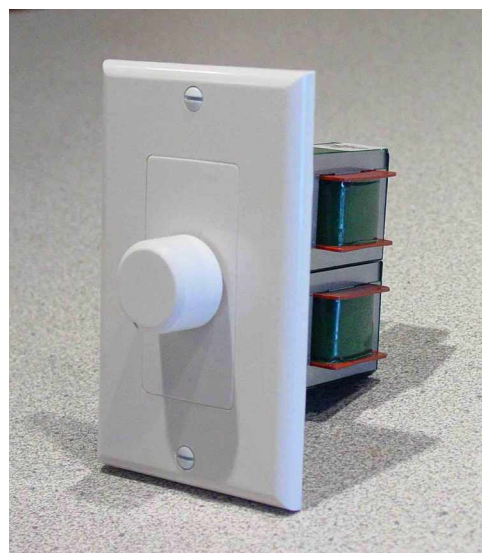

Technical Specifications

	VC210	VC75
Frequency Response	30-20kHz	30-20kHz
Insertion Loss	+/-2dB	+/-2dB
For use with Speaker Impedance	4-8 Ohm	4-8 Ohm
Power Handling (RMS)	75W	25W
Attenuation Steps	12 + Off	12 + Off
Attenuation per Step	1-8 3dB 9-12 6dB	1-8 3dB 9-12 6dB
Total Attenuation	42dB	42dB
Connections	Phoenix	Phoenix
Junction Box	Single Gang	Single Gang